

# VTX880

## 2U VPX Chassis, Six 3U Slots with RTM Support



VTX880

## Key Features

- 2U Open VPX rackmount system platform
- Horizontal slots
- Dedicated Switch/management slot
- Up to five 3U VPX payload slots
- Compatible with 0.8-inch, 0.85-inch and 1.0-inch modules
- Support for Rear Transition Modules (RTMs)
- Redundant cooling in push/pull side to side airflow configuration
- Optional JTAG Switch Module (JSM)

## Benefits

- 800W AC or 650W DC Power Input
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company



**vadatech**  
THE POWER OF VISION



# VTX880

The VTX880 is a 2U VPX chassis with six 3U VPX slots. The chassis can accept 0.8-inch, 0.85-inch and 1.0-inch pitch modules. The chassis is ideal for commercial deployment.

## Power Supplies

The VTX880 has a single AC input power supplies to provide 800W or -48V DC 650W. The chassis supplies 95W/slot and the AC input is universal.

## Cooling and Temperature Sensors


The VTX880 provides cooling to the VPX slots designed to meet ANSI/VITA 65 providing 18 CFM per slot at 0.24 in-H<sub>2</sub>O @ 5000 feet. The VTX880 provides push/pull cooling to the RTM slots.

## Backplane

The backplane provides five 3U VPX payload slots in a star configuration, fully compliant to VITA 46.0 baseline specification with additional support to the RTMs, compliant to VITA 46.10 and OpenVPX VITA65.

## JSM

There is an optional JTAG Switch Module to provide JTAG access to the rear.

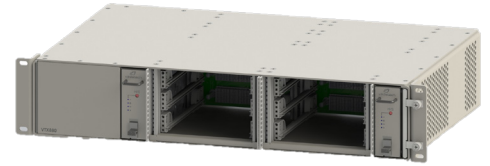

*Figure 1: Front View*



*Figure 2: Rear View*

# Backplane Connections

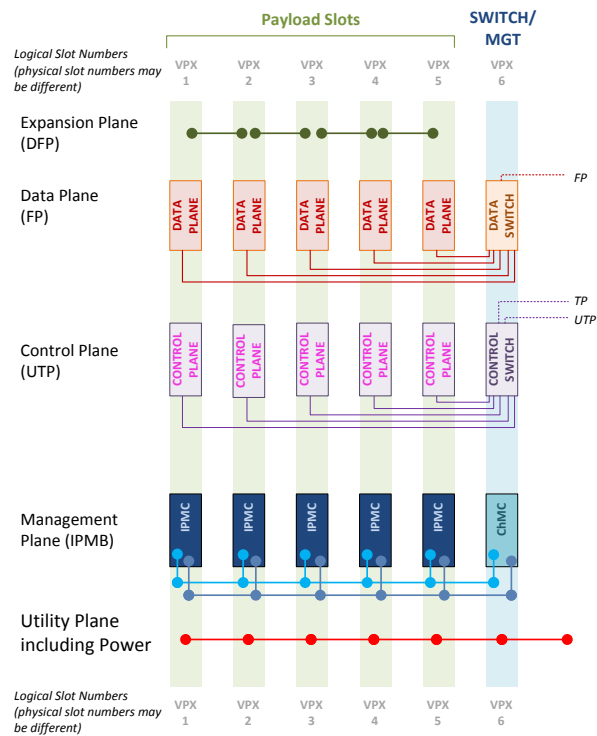


Figure 3: VTX880 Backplane Connections

The initial offering on VTX880 is based on backplane profile BKP3-CEN06\_15.2.2-n. VadaTech can also design additional VITA standard backplane profiles for customer specific applications. Please contact your local sales team for more information.

# Specifications

Architecture		
Physical	Dimensions	Height: 2U Width: 19" Depth: 12.5" Weight: TBD lbs.
Type	VPX Shelf	5 Payload Slots up to 1.0" pitch with a dedicated Switch/management slot
Standards		
VPX	Type	VITA-46.0 Baseline Specification
Configuration		
Power		800W AC input or -48V DC 650W
Environmental		See Ordering Options
Cooling		Right to Left
Other		
MTBF		MIL Hand book 217-F@ TBD hrs
Certifications		Designed to meet FCC, CE and UL certifications, where applicable
Standards		VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards
Warranty		Two (2) years

## INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of VPX products including chassis platforms, shelf managers, VPX modules, Switch and Payload Boards, RTMs, Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

# Ordering Options

## VTX880 – A00-D00-0HJ

A = Power supply	D = JSM	
0 = AC 800W 1 = -48V DC 650W	0 = Not included 1 = Included	
		H = Environmental
		See Environmental Specification* table option H description
		J = Conformal Coating
		0 = No coating 1 = Humiseal 1A33 polyurethane 2 = Humiseal 1B31 acrylic

## Environmental Specification\*

Option H	H = 0	
Operating Temperature	-5°C to +55°C	
Storage Temperature	-40°C to +85°C	
Operating Vibration	0.04 g2/Hz max	
Storage Vibration	20g	
Humidity	95% non-condensing	

\* Please contact VadaTech Sales for other specification

## Related Products

### VPX518



- AMC FPGA carrier for FMC per VITA-57
- Xilinx Zynq-7000 FPGA in FFG-900 package(XC7Z100 or XC7Z045) with embedded ARM®
- Supported by DAQ Series™ data

### VPX592



- 3U FPGA carrier for FPGA Mezzanine Card (FMC) per VITA-46 and VITA-57
- Xilinx Kintex UltraScale™ XCKU115 FPGA
- High-performance clock jitter cleaner

### VPX599



- 3U FPGA Dual DAC and dual ADC per VITA-46
- Xilinx Kintex UltraScale™ XCKU115 FPGA
- Dual ADC @ 6.4GSPS 12-bits

# Contact

## VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

## Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

[info@vadatech.com](mailto:info@vadatech.com) | [www.vadatech.com](http://www.vadatech.com)

## Europe: EMCOMO Solutions AG

Industriestr. 10, 89231 Neu-Ulm, Germany

Phone: +49 731 8803510 | Fax: +49 731 88035129

[vadatech@emcomo.de](mailto:vadatech@emcomo.de) | [www.emcomo.de](http://www.emcomo.de)

# Choose VadaTech

## We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

## We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

## We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

## We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



**vadatech**  
THE POWER OF VISION

## Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2018 VadaTech Incorporated. All rights reserved.  
DOC NO. 4FM737-12 REV 01 | VERSION 1.1 – AUG/18